
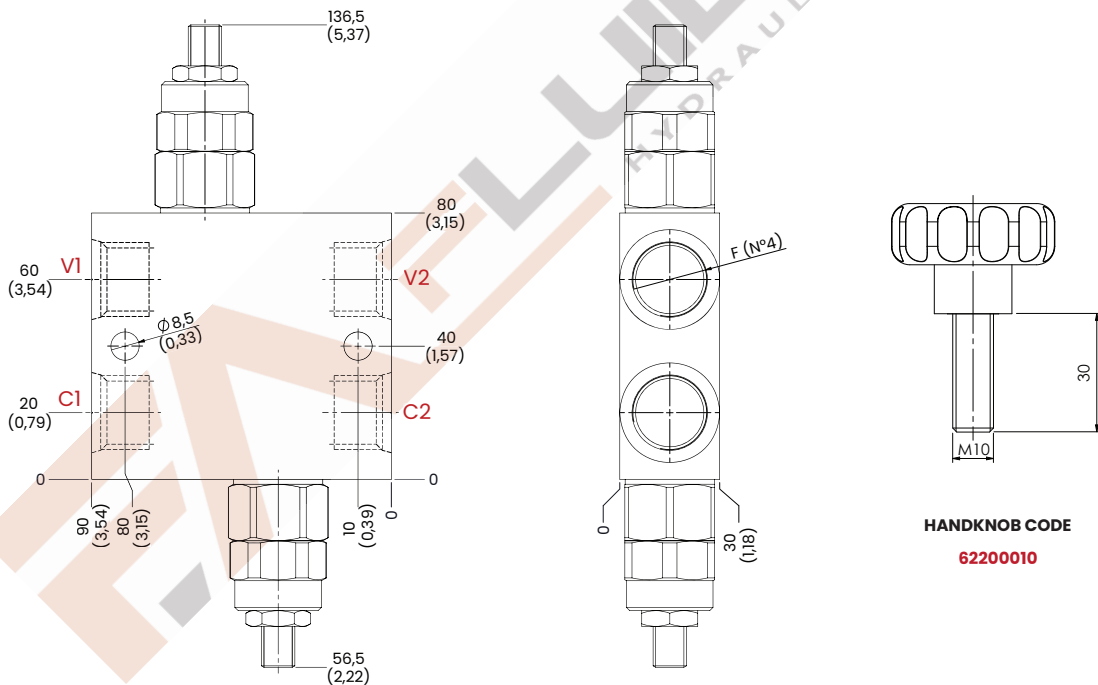



DOUBLE CROSS RELIEF VALVES 80 L


VAA valves with steel manifold and two pressure relief valves, they control the pressure on both connection lines.

HYDRAULIC CIRCUIT

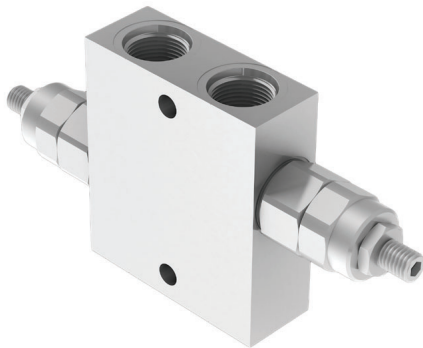

mm [Inches]

PERFORMANCES

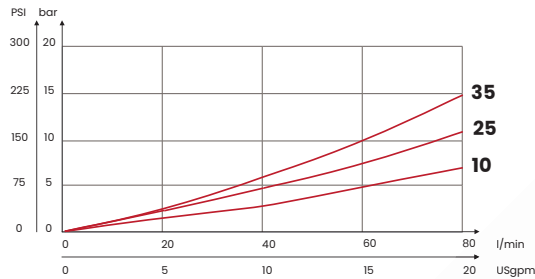

ORDERING CODE

CODE	TYPE	F ports	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	RANGE SPRING bar [PSI]	INCREASE TO TURN bar [PSI]	WEIGHT kg [lb]
FA6134	VAA3SC10H	SAE 10 [7/8-14 UNF]	80 [21,1]	350 [5075]	10/100 [145/1450]	16,5 [239]	1,40 [3,08]
FA6135	VAA3SC25H				20/250 [290/3625]	33 [479]	
FA6136	VAA3SC35H				50/350 [725/5075]	70 [1015]	
Steel body (on request aluminum body)							