

Suttner unloader valve ST-265 with switch




The choice of perfection



Suttner unloader valve ST-265 with switch

- Maximum inrush current: 10mA-5A(2A)
- Voltage: 12-24VDC, 12-250VAC
- Protection class IP65
- Cable 1.2 meters 3xAWG20





Switch also for retrofitting: If you want to switch off the pump motor during breaks in operation, use the ST-265 with an attached switch. The attached pressure switch is a toggle switch for NC/NO signal.

ST-265 with switch



⊕ = Inlet 3/8" F. ⊖ = Outlet 3/8" F.
 BP = Bypass 3/8" F. Ball check valve. Unloader valve with pressure switch (IP65) and cable 1,200 mm. Max. 350 bar / 80 °C

R+M Nr.	⊖
200 265 550	50 l/min

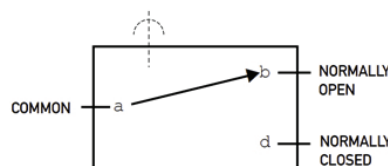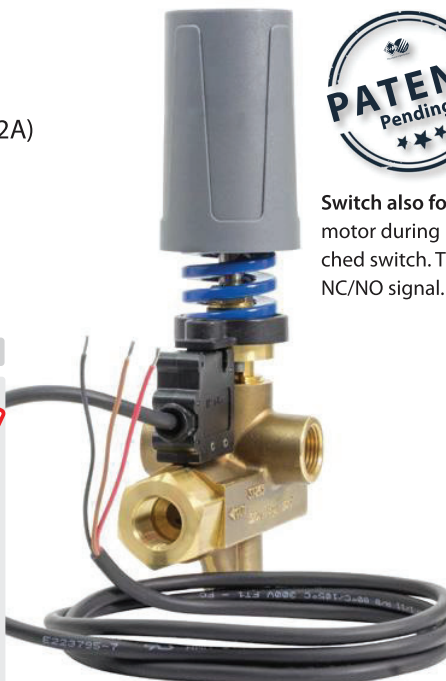

Repair/retrofit kit switch ST-265



Switch for Suttner unloader valve ST-265.
 Protection class IP65
 Cable 1.200 mm, 3xAWG20.
 Maximum inrush current: 10mA-5A(2A)

R+M Nr.	⊕
200 265 430	12-24VDC, 12-250VAC

Version 09.22